


# AT1135 Portable Radiometric Laboratory

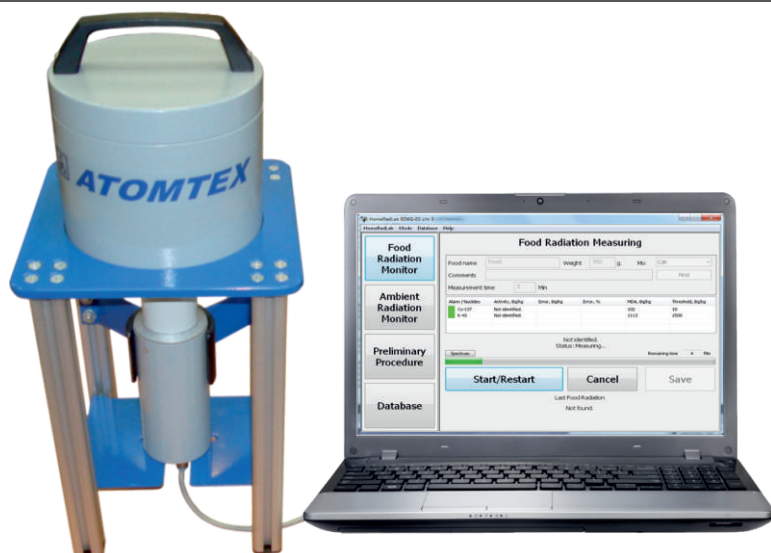

AT1135 Portable Radiometric Laboratory is a hand-carried measurement instrument of spectrometric type and is designed to determine relative activity of  $^{134}\text{Cs}$ ,  $^{137}\text{Cs}$  and  $^{40}\text{K}$  gamma-emitting radionuclides in food products as well as in-situ measurement of ambient gamma radiation dose rate equivalent.

## Operating principle

The unit has scintillation detector with NaI(Tl) crystal Ø25x40mm size inside lead protection. The unit automatically checks sample radionuclide content during sample radiometric radionuclide monitoring. The identification results are used for sample radionuclides activity calculation. Gamma ray instrument spectra are processed in "HomeRadLab" Software.

When the unit is in Dosimetry Mode (Detection unit is retracted from the lead protection) highly sensitive detector reacts instantly to the slightest ambient radiation level change relative to natural radiation background and measures it correctly.

All measurements and processing results are displayed on PC monitor in real-time pattern.

Specification	
Detector	Scintillator, NaI(Tl) Ø25x40 mm
Registered gamma radiation energy range in radiometric mode	50 keV – 1.5 MeV
Radionuclide specific activity measurement ranges for samples with 1 g/cm <sup>3</sup> density (measurement geometry: 0.5-litre Marinelli beaker)	$^{134}\text{Cs}$ $^{137}\text{Cs}$ $^{40}\text{K}$
	25 – 1·10 <sup>5</sup> Bq/kg 25 – 1·10 <sup>5</sup> Bq/kg 360 – 2·10 <sup>4</sup> Bq/kg
Limits of tolerable intrinsic relative error of specific activity measurement	±30% max.
Measured sample density range	0.5 – 1.5 g/cm <sup>3</sup>
Ambient gamma radiation dose equivalent rate measuring range (Detection unit is not covered by lead protection)	0.03 – 300 µSv/h
Limits of tolerable intrinsic relative error of dose rate measurement	±20%
Energy dependence relative to 662 keV ( $^{137}\text{Cs}$ )	±20% (50 keV – 1.5 MeV)
Typical resolution at 662 keV ( $^{137}\text{Cs}$ )	9%
Maximum input statistical load	≥5·10 <sup>4</sup> s <sup>-1</sup>
Number of ADC channels	512
Operation mode setup time	≤20 min
Continuous operation time	≥24 h
Operation temperature range	0°C to +40°C
Relative air humidity with temperature ≤35°C without condensation	≤75 %
Protection class	IP54
Connection to PC	USB
Overall dimensions, weight	Ø60x296 mm, 0.6 kg (Detection unit) 200x200x437 mm, 13 kg (Protection unit) 95x51x33 mm, 0.1 kg (USB-DU adapter)

The portable radiometric laboratory complies with: Safety requirements of IEC 61010-1:2010, EMC requirements of EN 55011:2009, IEC 61000-4-2:2008, IEC 61000-4-3:2008, IEC 61000-4-4:2004, IEC 61000-4-5:2005, IEC 61000-4-11:2004, IEC 61000-3-2:2006, IEC 6100-3-3:2005

Design and specifications are subject to change without notice



**ATOMTEX**<sup>®</sup>  
<http://www.atomtex.com>

*ENS*  
 Corporate Member  
 of European  
 Nuclear  
 Society



**Zievert**  
 a CapeSym Company

Zievert, Inc.  
 6 Huron Dr. Suite 1B  
 Natick, MA 01760 | +1 (508) 653-7100  
[www.zievert.com](http://www.zievert.com) | [sales@zievert.com](mailto:sales@zievert.com)  
 Official distributor in USA and Canada